


MADE IN THE USA

"Apollo"® Valves
Manufactured by Conbraco Industries, Inc.

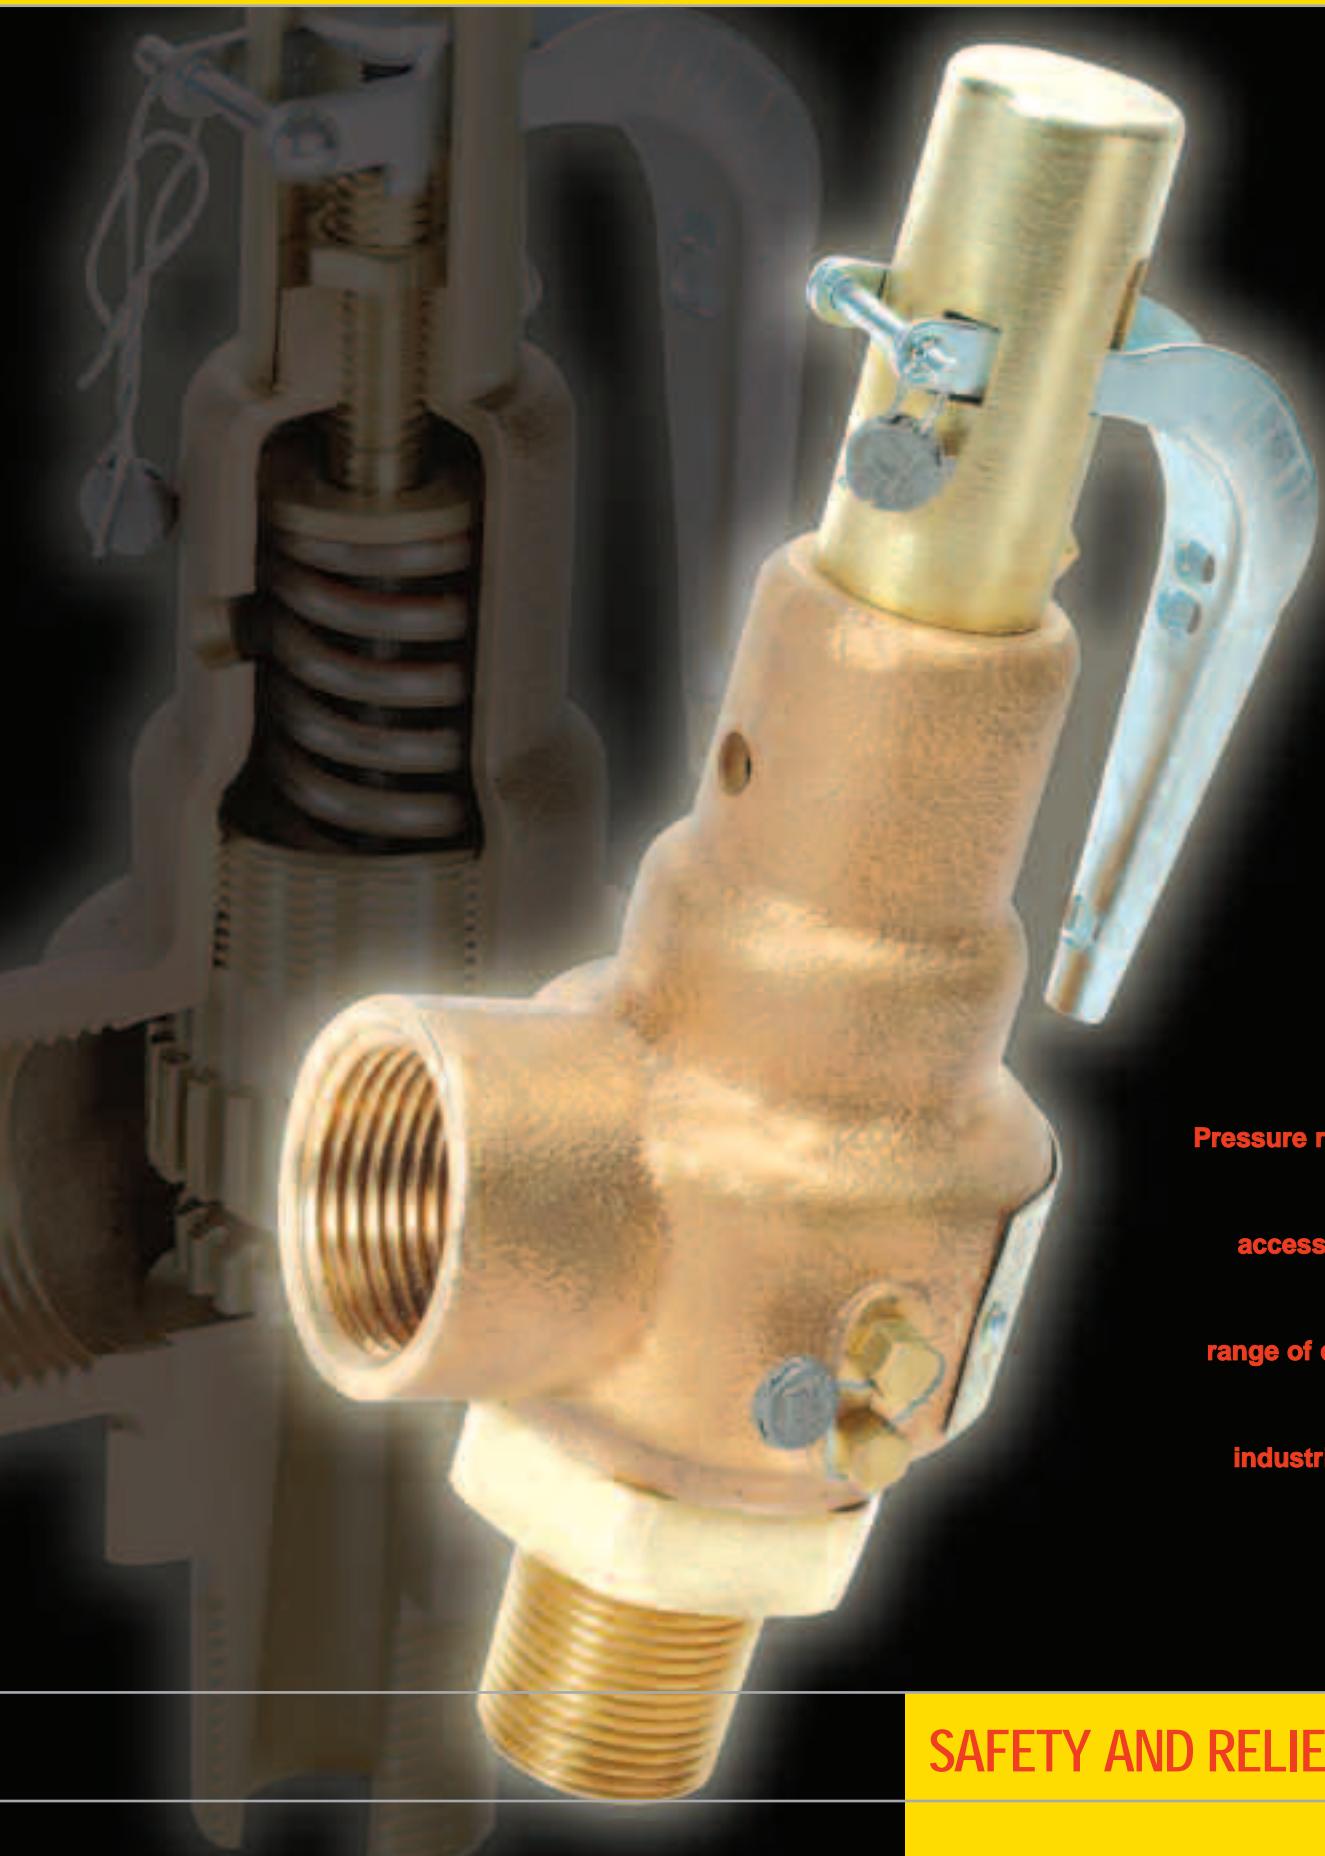

Pressure relief valves and

accessories for a wide

range of commercial and

industrial applications.

SAFETY AND RELIEF VALVES

About Conbraco



American-made, over 75 years strong

American Lubricator and Brass Co. and Sterling & Skinner Manufacturing Co., two established Detroit-based manufacturers of brass valves and fittings, merged in 1928. They adopted a new name, Consolidated Brass Company, and Conbraco Industries was born. Now 75 years later, from its headquarters near Charlotte, N.C., Conbraco operates more than one million square feet of ISO 9001:2000 certified manufacturing and warehousing space at four Carolinas facilities.

Reflecting its commitment to vertically integrated manufacturing, design innovation and customer support, Conbraco has invested more than \$100 million in technology-based processes during the past decade. Innovations include an advanced bronze foundry and one of the industry's most sophisticated investment casting facilities for steel and exotic alloys.

A long, successful history in safety and relief valves

Conbraco has been designing and producing ASME safety and relief valves for seven decades. Its portfolio includes more than 30 models of valves carrying the ASME Section I, Section IV and Section VIII designations. These products are specified around the globe for use in boilers, sterilizers, air compressors and a broad spectrum of commercial and industrial applications.

The company offers safety and relief valves with brass, bronze, cast iron, carbon steel and stainless steel body construction. Available in inlet sizes from 1/4" through 6", Conbraco valves are certified for steam, air/gas and liquid service, with set pressures up to 900 psi.

As part of its total quality program, Conbraco provides 100 percent factory testing of safety and relief valves prior to shipment. It maintains a network of regional ASME certified setting stations that offer prompt deliveries, factory authorized sales, service and repair.

Every Conbraco safety and relief valve represents our proud tradition of providing customers with real value and satisfying their needs with unmatched efficiency, consistency and speed.

This catalog provides you with a full overview of the Conbraco safety and safety relief valve product line plus information on proper valve selection and application. If you have any questions, please don't hesitate to contact your nearest Conbraco factory representative, authorized setting station or Conbraco customer service.

European CE/PED Compliance Now Available!

Several models of Apollo / Conbraco pressure relief valves listed in this catalog may now be furnished in compliance with the provisions of the European Pressure Equipment Directive 97/23/EC. These valves meet the essential safety requirements for Safety Hazard Category IV and Conformity Assessment Module H1.

CE conformance is signified by the inclusion of the  symbol on the valve nameplate.

CE marking is an option and must be specified at the time of order placement. Please consult the factory for details.

CE 0035

TÜV

V

UV

HV

3

"Apollo" Valves

Customer Service 1-704-841-6000



ASME Codes

ASME Section I, Power Boilers

Opening Pressure Tolerances

From 15 PSI to 70 PSI = plus/minus 2 PSI

From 71 PSI to 300 PSI = plus/minus 3%

Blowdown (Closing Pressure)

After blowing down, all valves shall close at a pressure not greater than that specified in the following table:

Set Pressure, psig	Maximum Blowdown
15 to 66	4 psi
67 to 250	6% of set pressure

The minimum blowdown for all safety valves shall be 2 psi or 2% of the set pressure, whichever is greater.

Seat Tightness

A tightness test shall be conducted at the maximum expected operating pressure, but at a pressure not exceeding the reseating pressure of the valve. When testing, a valve exhibiting no visible signs of leakage shall be considered adequately tight.

Recommended Operating Gap

For boilers having design pressures over 15 psig but not exceeding 300 psig, the minimum recommended differential between system operating and valve set pressure is 10% of design pressure, but not less than 7 psig.

Section VIII, Pressure Vessels

Opening Pressure Tolerances

From 15 PSI to 70 PSI: plus/minus 2 PSI

From 71 PSI to 300 PSI: plus/minus 3%

Blowdown

Section VIII does not specify a blowdown requirement for production testing by the valve manufacturer or assembler. Conbraco pressure relief valves which have adjustable blowdowns are capable of being set for 5% blowdown on compressible fluids. The user should specify blowdown based upon reclosing the valve above the normal system operating pressure.

Seat Tightness

A tightness test shall be conducted using steam, air or water as appropriate for the type of service. Test methods and acceptance criteria shall be in accordance with industry standards or API 527 as applicable.

Recommended Minimum Operating Gap


Set pressures to 70 PSI: 5 PSI minimum operating differential. Valve set pressures above 70 PSI: minimum 10% of pressure setting.

Importance Of Markings

Conbraco safety valves bear a variety of markings which indicate performance, testing and quality status.

These markings may include the following:

"V" Symbol in ASME Cloverleaf... Signifies the Conbraco Safety Valve has been designed, manufactured and tested in accordance with Section I of the ASME Code and is approved for use on power boilers.

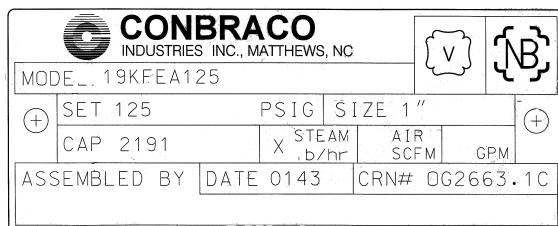

"UV" Symbol in ASME Cloverleaf... Signifies the Conbraco Safety valve has been designed, manufactured and tested in accordance with Section VIII of the ASME Code and is approved for use on unfired pressure vessels and pressure piping systems.

NB Symbol... indicates the capacity value stamped on the nameplate has been certified by the National Board of Boiler and Pressure Vessel inspectors.

CRN Number... Design registration number in accordance with CSA B51, the Canadian Boiler, Pressure Vessel and Pressure Piping Code. Conbraco Safety valves are registered in every Canadian Province and Territory.

Assembled By... Indicates the valve was assembled and tested by an authorized Conbraco assembler. These assemblers are factory trained and ASME authorized to set, service and repair Conbraco Safety Valves.

V

Section I
Power Boilers

UV

Section VIII
Pressure Vessels

19 Series

Bronze Safety Valves

For Steam, Air and Gas Service



A dependable cast bronze high capacity safety valve ideal for use on all types of boilers, piping systems and unfired pressure vessels. This rugged design features improved alignment for enhanced performance and reliability. Other features include optional metal seating, stainless steel wetted trim in all sizes, and a new, more descriptive model numbering system. Flow ratings are National Board certified in accordance with ASME sections I and VIII.

ASME Section I and VIII
Sizes 1/2" through 2-1/2"
Set pressures 5 to 300 psig
Maximum temperature is 406°F, 422°F for model 19S

Applications:

Overpressure protection of steam boilers, sterilizers, distillers, cookers, and pressure reducing stations. Pneumatic conveying equipment, air compressors, receivers and dryers. Steam, air and gas accumulators, pressure vessels and pressure piping systems.

Features

- New! - Wider wrenching hex for easier, faster installations!**
- Stainless steel springs are standard
- Choice of Teflon® or metal-to-metal seating
- Teflon® PFA seat resists corrosive boiler chemicals and excessive vibration
- High-capacity full nozzle design available in six orifice sizes
- Two control rings for maximum performance and adjustability
- Short "tuned" blow down minimizes product loss
- Tapped body drain allows piping of condensate away from equipment
- Reduced repair costs: soft seat easily replaced
- Registered in all Canadian provinces under CSA B51 CRN OG8547.5C

Options

- Choice of Teflon® or metal to metal seating
- Steam set pressures to 300 psi @ 422°F (Model 19S, stainless steel trim)
- 316 stainless steel wetted trim available for all sizes
- Anti-vibration damped lifting lever
- Oxygen cleaning


19 Series Model Numbering System

19K	D	C	K	165	A
Base Model Number	Orifice Letter	Inlet Size (in.) NPT	ASME Code and Service	Set Pressure In psi	Special Options
19K Brass Trim/Teflon Seat	D	C-1/2	A-Sect. I Steam		A – Anti-vibration trim
19M Brass Trim/Metal Seat	E	D-3/4	K- Sect. VIII Air		X – Oxygen cleaning
19L Stainless Trim/Teflon Seat	F	E-1	L-Sect. VIII Steam		*Other suffixes – factory issued
19S Stainless Trim/Metal Seat	G	F-1-1/4	N-Non-Code Air		
	H	G-1-1/2	P-Non-Code Steam		
	J	H-2			
		J-2-1/2			

4 Trim Styles to Choose From

Series	19K	19M	19L	19S
Trim	Brass	Brass	SS	SS
Seat	Teflon®	Metal to Metal	Teflon®	Metal to Metal
Max. Set - Steam	250	250	250	300
Max. Set - Air/Gas	300	300	300	300
Max. Temperature	406°F	406°F	406°F	422°F


©Teflon is a registered trademark of DuPont.

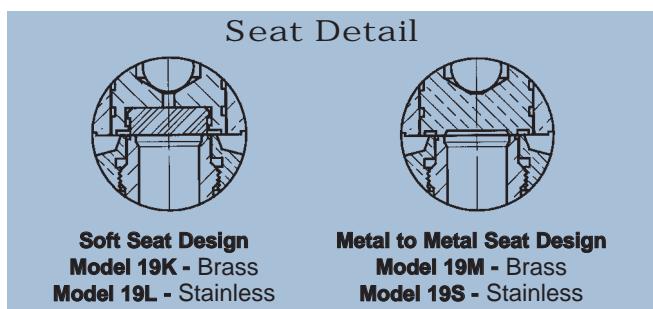




19 Series

Bronze Safety Valves

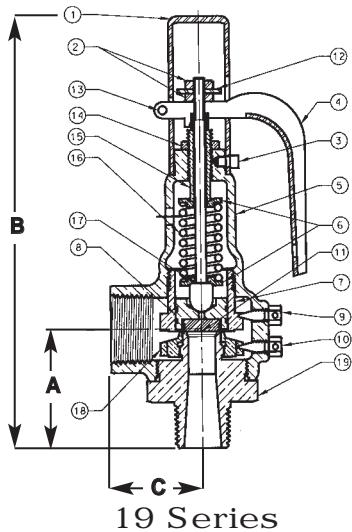

Materials

Item	Component	Material 19K, 19M	Material 19L, 19S
1	CAP	BRASS	BRASS
2	STEM NUT (2)	STEEL - PLATED	STEEL - PLATED
3	CAP LOCK SCREW	BRASS	BRASS
4	LIFT LEVER	STEEL - PLATED	STEEL - PLATED
5	BODY	BRONZE	BRONZE
6	SPRING WASHER (2)	BRASS	BRASS
7	GUIDE RING	BRASS	BRASS
8	DISC	BRASS	SS
9	GUIDE RING SCREW	BRASS	BRASS
10	NOZZLE RING SCREW	BRASS	BRASS
11	SEAT INSERT-19K &19L	PFA TEFILON®	PFA TEFILON®
12	LIFT WASHER	STEEL - PLATED	STEEL - PLATED
13	LEVER PIN	STEEL - PLATED	STEEL - PLATED
14	ADJUSTING SCREW LOCK NUT	STEEL - PLATED	STEEL - PLATED
15	ADJUSTING SCREW	BRASS	BRASS
16	SPRING	SS	SS
17	STEM	STEEL / BRASS	STEEL / BRASS
18	NOZZLE RING	BRASS	BRASS
19	NOZZLE	BRASS	SS
-	NAMEPLATE	SS	SS

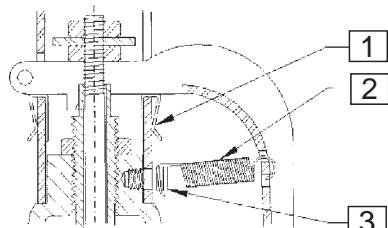

19 Series with option "A" Anti-vibration trim

Number	Component	Material
1	FRiction CLIP (4)	STEEL PLATED
2	EXTENSION SPRING	STAINLESS STEEL
3	CAP LOCK SCREW	STAINLESS STEEL

Note: Preparation includes threadlocking of all internal threaded connections.

Selection/Dimensions and Weights

Old Part Number	New Model Number	Orifice Letter	Size (in/mm.)			Dimensions (in./mm.)	Weight Each (lbs./kg.)
			Inlet x Outlet	A	B		
19-202	19*DC	D	1/2 X 3/4 15 x 20	2.21 56	6.52 166	1.37 35	1.6 .73
19-301	19*DD	D	3/4 X 3/4 20 x 20	2.21 56	6.52 166	1.37 35	1.6 .73
19-302	19*ED	E	3/4 X 1 20 x 25	2.50 64	7.16 182	1.75 44	2.0 .91
19-401	19*EE	E	1 X 1 25 x 25	2.64 67	7.30 185	1.75 44	2.2 1.0
19-402	19*FE	F	1 X 1-1/4 25 x 32	2.95 75	9.34 237	2.00 51	4.1 1.9
19-501	19*FF	F	1-1/4 X 1-1/4 32 x 32	2.95 75	9.34 237	2.00 51	4.3 2.0
19-502	19*GF	G	1-1/4 X 1-1/2 32 x 40	3.38 86	11.01 280	2.37 60	7.4 3.4
19-601	19*GG	G	1-1/2 X 1-1/2 40 x 40	3.38 86	11.01 280	2.37 60	7.6 3.4
19-602	19*HG	H	1-1/2 X 2 40 x 50	3.63 92	11.96 304	2.75 70	11.5 5.2
19-701	19*HH	H	2 X 2 50 x 50	3.63 92	11.96 304	2.75 70	11.6 5.3
New!	19*JG*	J	1-1/2F X 2-1/2 40 x 65	3.80 97	14.00 356	3.50 89	20.0 9.1
19-702	19*JH	J	2 X 2-1/2 50 x 65	4.06 103	14.25 362	3.50 89	19.9 9.0
19-801	19*JJ	J	2-1/2 X 2-1/2 65 x 65	4.50 114	14.68 373	3.50 89	20.8 9.4

* Specify trim letter
(see previous page):

1: Available in bronze trim only, Model 19KJG & 19MJG. Connections are 1-1/2" FNPT x 2-1/2" FNPT.



19 Series

Bronze Safety Valves

ASME Section I - Steam

V
V

POUNDS PER HOUR (KILOGRAMS PER HOUR) SATURATED STEAM @ 3%
OVERPRESSURE. NATIONAL BOARD CERTIFIED. RATINGS ARE 90% OF ACTUAL.

Orifice Letter	U.S. Customary Units lbs./hr.						Metric Units kg./hr.					
	D Area In. ²	E 0.129	F 0.230	G 0.359	H 0.589	J 1.509	D Area Cm. ²	E 0.835	F 1.483	G 2.315	H 3.800	J 5.932
Set Pressure psig							Set Pressure barg					
15	174	310	484	794	1,240	2,035	0.34	-	-	-	-	-
20	201	359	561	920	1,435	2,356	0.69	-	-	-	-	-
25	229	408	637	1,045	1,631	2,677	1.1	81	145	226	371	579
30	256	457	713	1,170	1,826	2,998	1.5	96	171	266	437	682
35	284	506	790	1,296	2,022	3,319	2	114	203	317	519	811
40	311	555	866	1,421	2,217	3,641	2.5	132	235	367	602	940
45	339	604	942	1,546	2,413	3,962	3	150	267	417	684	1,068
50	366	653	1,019	1,672	2,608	4,283	3.5	168	299	467	767	1,197
55	394	702	1,095	1,797	2,804	4,604	4	186	331	517	849	1,326
60	421	751	1,172	1,922	2,999	4,925	4.5	204	364	568	932	1,454
65	448	800	1,248	2,048	3,195	5,246	5	222	397	619	1,016	1,586
70	476	849	1,326	2,175	3,394	5,573	5.5	241	430	671	1,101	1,719
75	505	900	1,405	2,304	3,596	5,904	6	259	463	723	1,186	1,851
80	533	950	1,483	2,433	3,797	6,234	6.5	278	496	774	1,271	1,984
85	561	1,001	1,562	2,563	3,998	6,565	7	296	529	826	1,356	2,116
90	590	1,051	1,641	2,692	4,200	6,896	7.5	315	562	878	1,440	2,249
95	618	1,101	1,719	2,821	4,401	7,226	8	334	595	929	1,525	2,381
100	646	1,152	1,798	2,950	4,602	7,557	8.5	352	628	981	1,610	2,514
105	674	1,202	1,877	3,079	4,804	7,888	9	371	662	1,033	1,695	2,646
110	703	1,253	1,955	3,208	5,005	8,218	9.5	389	695	1,085	1,780	2,779
115	731	1,303	2,034	3,337	5,207	8,549	10	408	728	1,136	1,865	2,911
120	759	1,353	2,113	3,466	5,408	8,880	10.5	426	761	1,188	1,950	3,044
125	787	1,404	2,191	3,595	5,609	9,210	11	445	794	1,240	2,035	3,176
130	816	1,454	2,270	3,724	5,811	9,541	11.5	464	827	1,292	2,120	3,309
135	844	1,505	2,349	3,853	6,012	9,872	12	482	860	1,343	2,204	3,441
140	872	1,555	2,427	3,982	6,213	10,202	12.5	501	893	1,395	2,289	3,574
145	900	1,605	2,506	4,111	6,415	10,533	13	519	927	1,447	2,374	3,706
150	929	1,656	2,585	4,240	6,616	10,864	13.5	538	960	1,498	2,459	3,839
160	985	1,757	2,742	4,499	7,019	11,525	14	556	993	1,550	2,544	3,971
170	1,042	1,857	2,899	4,757	7,422	12,186	15	594	1,059	1,654	2,714	4,236
180	1,098	1,958	3,057	5,015	7,824	12,848	16	631	1,125	1,757	2,884	4,501
190	1,155	2,059	3,214	5,273	8,227	13,509	17	668	1,192	1,861	3,053	4,767
200	1,211	2,160	3,371	5,531	8,630	14,170	18	705	1,258	1,964	3,223	5,032
210	1,268	2,261	3,529	5,789	9,033	14,832	19	742	1,324	2,067	3,393	5,297
220	1,324	2,361	3,686	6,047	9,436	15,493	20	779	1,390	2,171	3,563	5,562
230	1,381	2,462	3,843	6,305	9,838	16,154	20.7	805	1,437	2,243	3,682	5,747
240	1,438	2,563	4,001	6,564	10,241	16,816	Approx. 0.1 barg increments	3.7	6.6	10.3	17.0	26.5
250	1,494	2,664	4,158	6,822	10,644	17,477						43.5
255	1,522	2,714	4,237	6,951	10,845	17,808						
260	1,551	2,765	4,315	7,080	11,047	18,138						
265	1,579	2,815	4,394	7,209	11,248	18,469						
270	1,607	2,865	4,473	7,338	11,449	18,800						
275	1,635	2,916	4,551	7,467	11,651	19,130						
280	1,664	2,966	4,630	7,596	11,852	19,461						
285	1,692	3,017	4,709	7,725	12,053	19,792						
290	1,720	3,067	4,787	7,854	12,255	20,122						
295	1,748	3,117	4,866	7,983	12,456	20,453						
300	1,777	3,168	4,945	8,112	12,658	20,784						
Approx. 1 psi increments	5.7	10.0	15.6	25.8	40.2	66.0						

Note: Specify model 19S with stainless steel wetted trim for steam settings beyond 250 psig / 17.2 barg.



19 Series

Bronze Safety Valves

ASME Section VIII - Steam

POUNDS PER HOUR (KILOGRAMS PER HOUR) SATURATED STEAM AT 10% OVER-PRESSURE. NATIONAL BOARD CERTIFIED. RATINGS ARE 90% OF ACTUAL.



U.S. Customary Units lbs./hr.							Metric Units kg./hr.						
Orifice Letter	D Area in. ²	E 0.129	F 0.230	G 0.359	H 0.589	J 0.919	Orifice Letter	D Area Cm. ²	E 0.835	F 1.483	G 2.315	H 3.800	J 5.932
Set Pressure psig							Set Pressure barg						
5*	122	218	340	558	871	1,429	0.34*	55	99	154	253	395	648
10*	167	298	466	765	1,193	1,958	0.69*	76	135	211	347	541	888
15	179	320	499	820	1,279	2,100	1.1	84	149	233	382	597	980
20	207	369	576	945	1,474	2,421	1.5	98	175	273	448	700	1,149
25	234	418	652	1,070	1,670	2,742	2	116	207	323	531	829	1,360
30	262	467	729	1,195	1,865	3,063	2.5	136	242	378	620	968	1,589
35	292	521	813	1,333	2,080	3,416	3	156	277	433	711	1,110	1,821
40	322	574	897	1,471	2,295	3,769	3.5	175	313	489	802	1,251	2,054
45	352	628	981	1,609	2,510	4,122	4	195	348	544	892	1,393	2,286
50	383	682	1,065	1,747	2,725	4,475	4.5	215	384	599	983	1,535	2,518
55	413	736	1,149	1,885	2,941	4,828	5	235	419	654	1,074	1,676	2,750
60	443	790	1,233	2,022	3,156	5,181	5.5	255	454	709	1,164	1,818	2,982
65	473	844	1,317	2,160	3,371	5,535	6	274	490	765	1,255	1,959	3,215
70	503	897	1,401	2,298	3,586	5,888	6.5	294	525	820	1,346	2,101	3,447
75	534	951	1,485	2,436	3,801	6,241	7	314	561	875	1,436	2,242	3,679
80	564	1,005	1,569	2,574	4,016	6,594	7.5	334	596	930	1,527	2,384	3,911
85	594	1,059	1,653	2,712	4,231	6,947	8	354	631	986	1,618	2,525	4,144
90	624	1,113	1,737	2,849	4,446	7,300	8.5	374	667	1,041	1,708	2,667	4,376
95	654	1,167	1,821	2,987	4,661	7,653	9	393	702	1,096	1,799	2,808	4,608
100	684	1,220	1,905	3,125	4,876	8,007	9.5	413	737	1,151	1,890	2,950	4,840
105	715	1,274	1,989	3,263	5,091	8,360	10	433	773	1,207	1,980	3,091	5,072
110	745	1,328	2,073	3,401	5,306	8,713	10.5	453	808	1,262	2,071	3,233	5,305
115	775	1,382	2,157	3,539	5,521	9,066	11	473	844	1,317	2,162	3,374	5,537
120	805	1,436	2,241	3,677	5,736	9,419	11.5	493	879	1,372	2,252	3,516	5,769
125	835	1,489	2,325	3,814	5,951	9,772	12	512	914	1,428	2,343	3,657	6,001
130	866	1,543	2,409	3,952	6,167	10,125	12.5	532	950	1,483	2,434	3,799	6,234
135	896	1,597	2,493	4,090	6,382	10,479	13	552	985	1,538	2,524	3,941	6,466
140	926	1,651	2,577	4,228	6,597	10,832	13.5	572	1,021	1,593	2,615	4,082	6,698
145	956	1,705	2,661	4,366	6,812	11,185	14	592	1,056	1,649	2,706	4,224	6,930
150	986	1,759	2,745	4,504	7,027	11,538	15	631	1,127	1,759	2,887	4,507	7,395
155	1,017	1,812	2,829	4,641	7,242	11,891	16	671	1,197	1,870	3,068	4,790	7,859
160	1,047	1,866	2,913	4,779	7,457	12,244	17	711	1,268	1,980	3,250	5,073	8,324
165	1,077	1,920	2,997	4,917	7,672	12,597	18	750	1,339	2,091	3,431	5,356	8,788
170	1,107	1,974	3,081	5,055	7,887	12,951	19	790	1,410	2,201	3,612	5,639	9,253
180	1,167	2,082	3,249	5,331	8,317	13,657	20	830	1,480	2,312	3,794	5,922	9,717
190	1,228	2,189	3,417	5,606	8,747	14,363	20.7	857	1,530	2,389	3,920	6,120	10,042
200	1,288	2,297	3,585	5,882	9,177	15,069	Approx. 0.1 barg increments	4.0	7.1	11.5	18.1	28.3	46.4
210	1,349	2,405	3,753	6,158	9,608	15,776							
220	1,409	2,512	3,921	6,433	10,038	16,482							
230	1,469	2,620	4,089	6,709	10,468	17,188							
240	1,530	2,727	4,257	6,985	10,898	17,894							
250	1,590	2,835	4,425	7,260	11,328	18,601							
255	1,620	2,889	4,509	7,398	11,543	18,954							
260	1,651	2,943	4,593	7,536	11,758	19,307							
265	1,681	2,997	4,677	7,674	11,973	19,660							
270	1,711	3,050	4,761	7,812	12,188	20,013							
275	1,741	3,104	4,845	7,950	12,403	20,366							
280	1,771	3,158	4,929	8,087	12,618	20,720							
285	1,801	3,212	5,013	8,225	12,834	21,073							
290	1,832	3,266	5,097	8,363	13,049	21,426							
295	1,862	3,320	5,181	8,501	13,264	21,779							
300	1,892	3,373	5,265	8,639	13,479	22,132							
Approx. 1 psi increments	6.0	10.8	16.8	27.6	43.0	70.6							

Note: Specify model 19S with stainless steel wetted trim for steam settings beyond 250 psig / 17.2 barg.

* Settings below 15 psi (1.1 barg) are non-ASME code.



19 Series

Bronze Safety Valves

ASME Section VIII - Air

STANDARD CUBIC FEET PER MINUTE (NORMALIZED CUBIC METERS PER HOUR) OF AIR
AT 10% OVERPRESSURE. NATIONAL BOARD CERTIFIED. RATINGS ARE 90% OF ACTUAL.

U.S. Customary Units SCFM							Metric Units Nm ³ /hr.						
Orifice Letter	D Area in. ²	E 0.129	F 0.230	G 0.359	H 0.589	J 1.509	Orifice Letter	D Area Cm. ²	E 0.835	F 1.483	G 2.315	H 3.800	J 5.932
Set Pressure psig							Set Pressure barg						
5*	39	69	108	178	277	455	0.34*	66	118	184	302	471	773
10*	54	97	151	248	387	635	0.69*	92	164	256	421	657	1,078
15	64	114	178	292	455	747	1.1	112	199	311	510	796	1,306
20	74	131	205	336	525	862	1.5	131	233	364	598	933	1,531
25	83	149	232	381	594	976	2	155	276	431	708	1,105	1,813
30	93	166	259	426	664	1,090	2.5	181	323	504	827	1,291	2,119
35	104	185	289	475	740	1,216	3	207	370	578	948	1,480	2,428
40	115	204	319	524	817	1,342	3.5	234	417	651	1,069	1,669	2,738
45	125	224	349	573	894	1,467	4	260	464	725	1,190	1,857	3,047
50	136	243	379	622	970	1,593	4.5	287	511	799	1,311	2,046	3,357
55	147	262	409	671	1,047	1,719	5	313	559	872	1,431	2,235	3,667
60	158	281	439	720	1,123	1,844	5.5	340	606	946	1,552	2,423	3,976
65	168	300	469	769	1,200	1,970	6	366	653	1,020	1,673	2,612	4,286
70	179	319	499	818	1,276	2,096	6.5	392	700	1,093	1,794	2,801	4,596
75	190	339	528	867	1,353	2,221	7	419	747	1,167	1,915	2,989	4,905
80	201	358	558	916	1,429	2,347	7.5	445	795	1,241	2,036	3,178	5,215
85	211	377	588	965	1,506	2,473	8	472	842	1,314	2,157	3,367	5,524
90	222	396	618	1,014	1,583	2,598	8.5	498	889	1,388	2,278	3,555	5,834
95	233	415	648	1,063	1,659	2,724	9	525	936	1,461	2,398	3,744	6,144
100	244	434	678	1,112	1,736	2,850	9.5	551	983	1,535	2,519	3,933	6,453
105	254	454	708	1,161	1,812	2,976	10	577	1,030	1,609	2,640	4,122	6,763
110	265	473	738	1,211	1,889	3,101	10.5	604	1,078	1,682	2,761	4,310	7,072
115	276	492	768	1,260	1,965	3,227	11	630	1,125	1,756	2,882	4,499	7,382
120	287	511	798	1,309	2,042	3,353	11.5	657	1,172	1,830	3,003	4,688	7,692
125	297	530	828	1,358	2,118	3,478	12	683	1,219	1,903	3,124	4,876	8,001
130	308	549	857	1,407	2,195	3,604	12.5	710	1,266	1,977	3,245	5,065	8,311
135	319	568	887	1,456	2,271	3,730	13	736	1,313	2,051	3,365	5,254	8,621
140	330	588	917	1,505	2,348	3,855	13.5	763	1,361	2,124	3,486	5,442	8,930
145	340	607	947	1,554	2,425	3,981	14	789	1,408	2,198	3,607	5,631	9,240
150	351	626	977	1,603	2,501	4,107	15	842	1,502	2,345	3,849	6,008	9,859
160	373	664	1,037	1,701	2,654	4,358	16	895	1,596	2,493	4,091	6,386	10,478
165	383	683	1,067	1,750	2,731	4,484	17	948	1,691	2,640	4,332	6,763	11,097
170	394	703	1,097	1,799	2,807	4,610	18	1,000	1,785	2,787	4,574	7,141	11,717
180	416	741	1,156	1,897	2,960	4,861	19	1,053	1,879	2,935	4,816	7,518	12,336
190	437	779	1,216	1,996	3,114	5,112	20	1,106	1,974	3,082	5,058	7,895	12,955
200	459	818	1,276	2,094	3,267	5,364	20.7	1,143	2,040	3,185	5,227	8,160	13,389
210	480	856	1,336	2,192	3,420	5,615	Approx. 0.1 barg increments						
220	502	894	1,396	2,290	3,573	5,867	5.3	9.4	14.7	24.2	37.7	61.9	
230	523	932	1,456	2,388	3,726	6,118							
240	545	971	1,515	2,486	3,879	6,369							
250	566	1,009	1,575	2,584	4,032	6,621							
255	577	1,028	1,605	2,633	4,109	6,746							
260	587	1,047	1,635	2,682	4,185	6,872							
265	598	1,067	1,665	2,731	4,262	6,998							
270	609	1,086	1,695	2,781	4,338	7,124							
275	620	1,105	1,725	2,830	4,415	7,249							
280	630	1,124	1,755	2,879	4,491	7,375							
285	641	1,143	1,784	2,928	4,568	7,501							
290	652	1,162	1,814	2,977	4,645	7,626							
295	663	1,182	1,844	3,026	4,721	7,752							
300	673	1,201	1,874	3,075	4,798	7,878							
Approx. 1 psi increments	2.1	3.8	6.0	9.8	15.3	25.1							

Note: To correct for temperature or specific gravities other than air (=1.0), multiply the SCFM from the capacity tables by factor Ksg (See page 50)

* Settings below 15 psi (1.1 barg) are non-ASME code.

Correction Factors

AIR AND GAS TEMPERATURE CORRECTION FACTORS

To correct for temperatures other than 60°F at the valve inlet, multiply the SCFM from the capacity tables by factor K_t.

Temp°F	K _t						
0	1.063	90	0.972	260	0.850	440	0.760
10	1.052	100	0.964	280	0.838	460	0.752
20	1.041	120	0.947	300	0.827	480	0.744
30	1.030	140	0.931	320	0.816	500	0.737
40	1.020	160	0.916	340	0.806	550	0.718
50	1.010	180	0.901	360	0.796	600	0.701
60	1.000	200	0.888	380	0.787	650	0.685
70	0.991	220	0.874	400	0.778	700	0.669
80	0.981	240	0.862	420	0.769	750	0.656

GAS AND LIQUID RELATIVE DENSITY CORRECTION FACTORS

To correct for a specific gravity other than air or water (=1.0)
multiply the SCFM or GPM from the capacity tables by factor K_{sg}.

Specific Gravity	K _{sg}						
0.10	3.160	0.75	1.155	1.25	0.913	2.50	0.633
0.20	2.240	0.80	1.117	1.30	0.877	3.00	0.577
0.30	1.825	0.90	1.085	1.40	0.845	3.50	0.535
0.40	1.580	0.95	1.025	1.50	0.817	4.00	0.500
0.50	1.414	1.00	1.00	1.60	0.791	4.50	0.471
0.55	1.350	1.05	0.975	1.70	0.768		
0.60	1.290	1.10	0.955	1.80	0.745		
0.65	1.240	1.15	0.933	1.90	0.725		
0.70	1.195	1.20	0.913	2.00	0.707		