



# UNITED BRASS WORKS, INC.

714 S. Main St. Randleman, N.C. 27317

Tel: 800-334-3035 Fax: 800-498-4696 www.ubw.com



## Model 62 Swing Check Valve

Complies with MSS-SP-80-2013

CRN OCO7135.2C

200WSP @ 406° Max

400 WOG

100% Pressure Tested

Threaded Ends

**\*Contains Lead. Not Intended for Use in Potable Water Systems\***

*Install in horizontal position with cap in upright position.*


*Not recommended for pulsating or vibrating service.*



*When used on Boiler feed line it is recommended that a #50T spring loaded check valve be used in conjunction with #62 with the #62 located nearest to the boiler and the #50T located nearest to the pump.*

## MATERIAL LIST

| NO. | DESCRIPTION                        | MATERIAL        |
|-----|------------------------------------|-----------------|
| 1   | Cap (1/4" - 3/4")<br>Cap (1" - 3") | Brass<br>Bronze |
| 2   | Hinge Pin                          | Brass           |
| 3   | Hinge                              | Stainless Steel |
| 4   | Body                               | Bronze          |
| 5   | Disc                               | Bronze          |
| 6   | Disc Nut                           | Brass           |

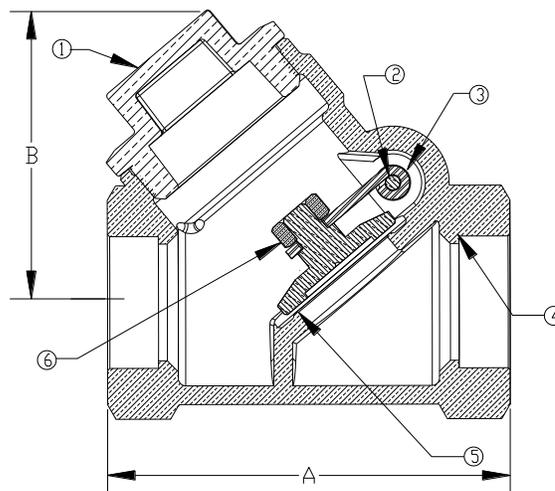

| Size             | 1/4" | 3/8" | 1/2" | 3/4" | 1"   | 1 1/4" | 1 1/2" | 2"    | 3"    |
|------------------|------|------|------|------|------|--------|--------|-------|-------|
| A                | 2.38 | 2.53 | 2.66 | 3.09 | 3.53 | 5.13   | 5.13   | 5.56  | 9.13  |
| B                | 1.53 | 1.53 | 1.53 | 1.88 | 2.09 | 3.63   | 3.63   | 4.56  | 5.58  |
| Ship Wgt. (lbs.) | 0.75 | 0.81 | 0.76 | 1.19 | 1.73 | 5.75   | 5.75   | 10.00 | 29.00 |
| Qty. Per Ctn.    | 12   | 12   | 12   | 12   | 6    | 2      | 2      | 1     | 1     |